


AXIAL FAN WITH PROTECTIVE GRID, BLOWING

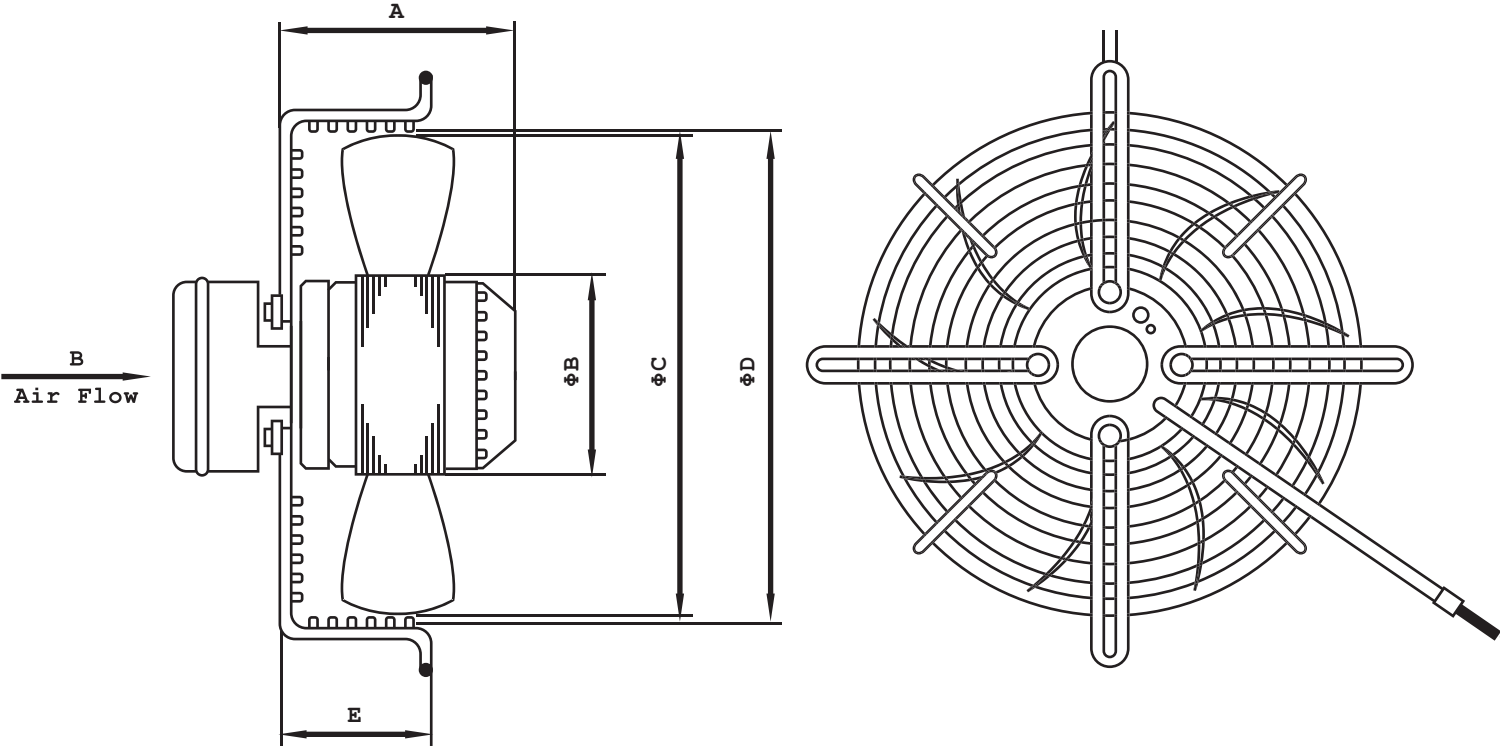

	A	ΦB	ΦC	ΦD	E
FR-250-BG	80±1	92	250 ⁰ ₋₅	275 ⁺⁵ ₀	60±1
FR-300-BG	116±2	92	300 ⁰ ₋₅	320 ⁺⁵ ₀	80 ⁺⁵ ₀
FR-350-BG	134±1	102	350 ⁰ ₋₅	370 ⁺⁵ ₀	80 ⁺⁵ ₀
FR-400-BG	147±1	102	400 ⁰ ₋₅	420 ⁺⁵ ₀	90 ⁺⁵ ₀
FR-450-BG	160±1	102	450 ⁰ ₋₅	470 ⁺⁵ ₀	90 ⁺⁵ ₀
FR-500-BG	143±1	137	500 ⁰ ₋₅	520 ⁺⁵ ₀	90 ⁺⁵ ₀
FR-550-BG	158±1	137	550 ⁰ ₋₅	575 ⁺⁵ ₀	100 ⁺⁵ ₀
FR-630-BG	178±1	137	630 ⁰ ₋₅	650 ⁺⁵ ₀	100 ⁺⁵ ₀
FR-710-BG	240±1	180	703 ⁰ ₋₅	770 ⁺⁵ ₀	175 ⁺⁵ ₀
FR-800-BG	240±1	180	784 ⁰ ₋₅	857 ⁺⁵ ₀	175 ⁺⁵ ₀