
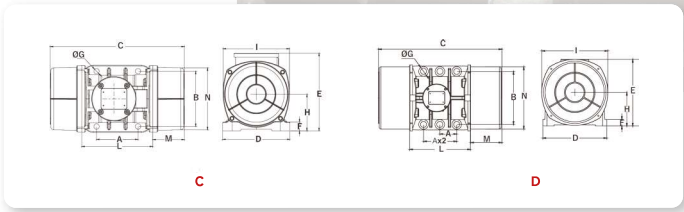
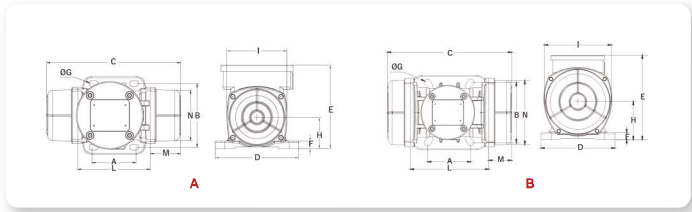


TRÓJFAZOWY (230V/400V) 4-BIEGUNOWY 1500/1800 OBR./MIN. 50/60HZ
THREE PHASE (230V/400V) 4 POLES 1500/1800RPM 50/60HZ

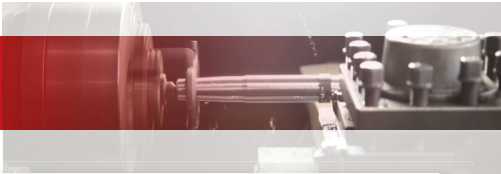

Model	Napięcie (V)	Prąd(A.Max.Y)	Moc (KW)	Siła (KN)	Waga (KG)	Rozmiar
Model	Voltage(V)	Current(A.Max.Y)	Power(KW)	Force(KN)	Weight (KG)	Size
MV40/15	230/400	0.26	0.04	0.3	4.6	size10
MV90/15	230/400	0.31	0.12	0.9	6.8	size20
MV200/15	230/400	0.49	0.16	2	12.8	size30
MV250/15	230/400	0.54	0.18	2.5	12.9	size30
MV300/15	230/400	0.62	0.20	3	13.8	size30
MV400/15	230/400	0.84	0.30	4	19.6	size40
MV500/15	230/400	1.06	0.35	5	21.0	size40
MV700/15	230/400	1.32	0.62	7	28.2	size50
MV800/15	230/400	1.36	0.65	8	29.1	size50
MV1100/15	230/400	1.4	0.65	11	36.5	size50
MV1400/15	230/400	1.78	0.90	14	60.5	size60
MV1700/15	230/400	2.09	1.15	17	62.5	size60
MV2400/15	230/400	3.2	1.6	24	68.0	size60
MV2500/15	230/400	3.4	1.8	25	97.5	size70
MV3000/15	230/400	3.68	1.9	30	110.0	size70
MV3800/15	230/400	4.15	2.2	38	130.0	size75
MV4300/15	230/400	4.5	2.5	43	145.0	size75
MV5500/15	230/400	6.5	3.6	55	193	size80
MV7200/15	400/690	8.5	5	72	253	size85
MV9000/15	400/690	13.4	7.5	90	269	size85
MV10000/15	400/690	14.4	7.8	100	329	size90
MV11500/15	400/690	15.5	9	116	445	size100
MV14500/15	400/690	18.5	11.5	141	460	size100

*Możliwość dostosowania napięcia i częstotliwości do indywidualnych wymagań
*Special voltage and frequency can be customized

Model	A	B	ØG	C	D	E	F	H	I	L	M	Ławik kablowy	Rys.
Model												Cable gland	Fig
MV40/15	62-74	106	9	225	130	131	11	47	94	121	52	88	M16X1.5 A
MV90/15	62-74	106	9	233	130	155	13	63.5	119	123	55	111	M20×1.5 A
MV200/15	90	125	13	307	155	175	14	78	142	163	72	134	M20×1.5 B
MV250/15	90	125	13	307	155	175	14	78	142	163	72	134	M20×1.5 B
MV300/15	90	125	13	307	155	175	14	78	142	163	72	134	M20×1.5 B
MV400/15	105	140	13	338	170	197	22	92.5	168	178	80	159	M20×1.5 C
MV500/15	105	140	13	338	170	197	22	92.5	168	178	80	159	M20×1.5 C
MV700/15	120	170	17	395	208	210	24	95	180	205	95	170	M20×1.5 C
MV800/15	120	170	17	395	208	210	24	95	180	205	95	170	M20×1.5 C
MV1100/15	120	170	17	457	208	210	24	95	180	205	126	170	M20×1.5 C
MV1400/15	140	190	17	444.5	230	262	30	122	237	224.5	110	222	M25×1.5 C
MV1700/15	140	190	17	464	230	262	30	122	237	224	120	222	M25×1.5 C
MV2400/15	140	190	17	514	230	262	30	122	237	224	145	222	M25×1.5 C
MV2500/15	155	225	25	558.5	308	318	34	141	280	278.5	140	264	M32×1.5 C
MV3000/15	155	225	25	558.5	308	318	34	148.5	281	278.5	140	264	M32×1.5 C
MV3800/15	155	255	25	588.5	308	318	34	150.5	281	278.5	155	264	M32×1.5 C
MV4300/15	155	255	25	602.5	308	318	34	150.5	281	278.5	162	264	M32×1.5 C
MV5500/15	180	280	26	621.5	335	353	35	170	330	321	150	311	M32×1.5 C
MV7200/15	200	320	28	629	388	402	42	206	400	369	130	378	M32×1.5 C
MV9000/15	200	320	28	629	388	402	42	206	400	369	130	378	M32×1.5 C
MV10000/15	125	380	39	747	446	415	42	206	400	405	170	378	M32×1.5 D
MV11500/15	140	440	45	906	530	484	37	232	445	486	210	424	M32×1.5 E
MV14500/15	140	440	45	906	530	484	37	232	445	486	210	424	M32×1.5 E