
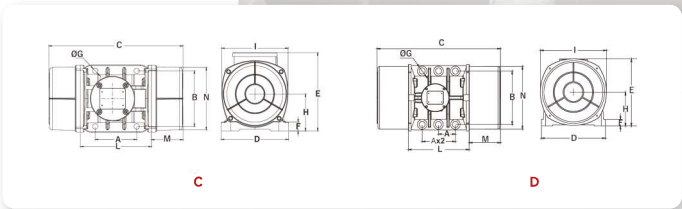


TRÓJFAZOWY (230V/400V) 2 BIEGUNY 3000/3600 OBR./MIN.50/60HZ
THREE PHASE (230V/400V) 2 POLES 3000/3600RPM 50/60HZ

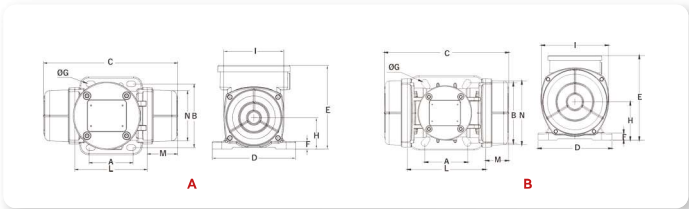

Model	Napięcie (V)	Prąd(A.Max.Y)	Moc (KW)	Siła (kN)	Waga (Kg)	Rozmiar
Model	Voltage(V)	Current(A.Max.Y)	Power(KW)	Force(KN)	Weight (KG)	Size
MV40/3	230/400	0.13	0.05	0.3	2.4	size1
MV60/3	230/400	0.16	0.08	0.7	4.6	size10
MV100/3	230/400	0.19	0.1	1	4.7	size10
MV200/3	230/400	0.35	0.18	2	6.3	size20
MV300/3	230/400	0.52	0.27	3	9.9	size30
MV400/3	230/400	0.58	0.3	4	10.2	size30
MV500/3	230/400	0.96	0.5	5	16.7	size40
MV700/3	230/400	1.25	0.66	7	17.2	size40
MV800/3	230/400	1.45	0.75	8	21.8	size50
MV1200/3	230/400	1.85	0.95	10	22.4	size50
MV1300/3	230/400	2.44	1.3	13	23.9	size50
MV1600/3	230/400	2.94	1.57	16	53.5	size60
MV1800/3	230/400	3.53	1.8	18	54.5	size60
MV2000/3	230/400	3.75	2	20	55	size60
MV2200/3	230/400	4.07	2	22	55.5	size60
MV2300/3	230/400	4.44	2.4	23	57	size60
MV3200/3	230/400	5.3	2.9	32	103	size75
MV4000/3	230/400	5.3	2.9	40	107	size75
MV5000/3	230/400	7.22	4	50	111.2	size75
MV6500/3	400/690	9.4	5.5	65	230	size85
MV9000/3	400/690	17.8	10	90	241	size85
MV12000/3	400/690	19	12.5	120	280	size90
MV15000/3	400/690	27.5	18.8	150	340	size90

Model	A	B	ØG	C	D	E	F	H	I	L	M	N	ØL	Rys.
Model	A	B	ØG	C	D	E	F	H	I	L	M	N	ØL	Fig
MV40/3	18.5-34	91	9	175	110	96	12	37.5	68	103	36	65.5	M16X1.5	I
MV60/3	62-74	106	9	215	130	131	11	47	94	121	47	88	M16x1.5	A
MV100/3	62-74	106	9	225	130	131	11	47	94	121	52	88	M16x1.5	A
MV200/3	62-74	106	9	233	130	155	13	64	119	123	55	111	M20x1.5	A
MV300/3	90	125	13	257	155	175	14	78	142	163	47	134	M20x1.5	B
MV400/3	90	125	13	257	155	175	14	78	142	163	47	134	M20x1.5	B
MV500/3	105	140	13	338	170	197	22	92.5	168	178	80	159	M20x1.5	C
MV700/3	105	140	13	338	170	197	22	92.5	168	178	80	159	M20x1.5	C
MV800/3	120	170	17	325	208	210	24	95	180	205	60	170	M20x1.5	C
MV1200/3	120	170	17	325	208	210	24	95	180	205	60	170	M20x1.5	C
MV1300/3	120	170	17	325	208	210	24	95	180	205	60	170	M20x1.5	C
MV1600/3	140	190	17	416.5	230	262	30	122	237	224.5	96	222	M25x1.5	C
MV1800/3	140	190	17	416.5	230	262	30	122	237	224.5	96	222	M25x1.5	C
MV2000/3	140	190	17	416.5	230	262	30	122	237	224.5	96	222	M25x1.5	C
MV2200/3	140	190	17	416.5	230	262	30	122	237	224.5	96	222	M25x1.5	C
MV2300/3	140	190	17	416.5	230	262	30	122	237	224.5	96	222	M25x1.5	C
MV3200/3	155	255	25	526.5	308	318	34	148.5	281	278.5	124	264	M32x1.5	C
MV4000/3	155	255	25	526.5	308	318	34	148.5	281	278.5	124	264	M32x1.5	C
MV5000/3	155	255	25	526.5	308	318	34	148.5	281	278.5	124	264	M32x1.5	C
MV6500/3	200	320	28	639.5	388	402	42	206	400	369.5	130	378	M32x1.5	C
MV9000/3	200	320	28	639.5	388	402	42	206	400	369.5	130	378	M32x1.5	C
MV12000/3	125	380	39	665.5	446	415	42	206	400	405.5	130	378	M32x1.5	D
MV15000/3	125	380	39	665.5	446	415	42	206	400	405.5	130	378	M32x1.5	D

*Możliwość dostosowania napięcia i częstotliwości do indywidualnych wymagań
*Special voltage and frequency can be customized